


Supco

3 Wire Hard Start Kit

SK3W Series

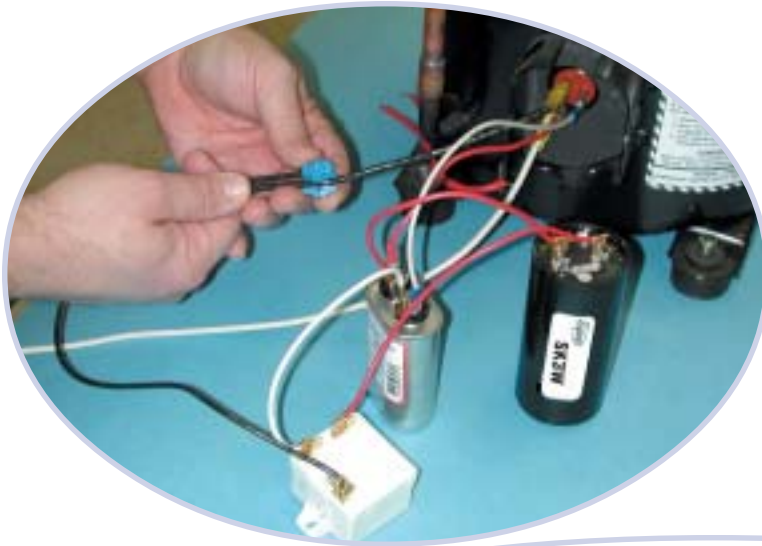

*For Professionals who Prefer
OEM-Style 3-Wire Installation*

The SUPCO SK3W Series Hard Starts provide the service professional with an OEM option when the application calls for a hard start. Combining a potential relay and start capacitor results in a True 3-Wire solution.

5 Versions

Part No.	H.P. Ratings	Compressor	Maximum Operating Voltage	Start Cap. (Mfd)	Start Cap. (Voltage)
SK3W2	1 thru. 2 HP	Standard	500 VAC	88 - 108	330 VAC
SK3W3	2 ½ thru. 3 ½ HP	Standard	420 VAC	189 - 227	330 VAC
SK3W5	4 thru. 5 HP	Standard	420 VAC	243 - 292	330 VAC
SK3W4S	3 thru. 4 HP	Scroll	500 VAC	189 - 227	330 VAC
SK3W6S	4 ½ thru. 6 HP	Scroll	420 VAC	270 - 324	330 VAC




SEALED UNIT PARTS CO., INC.
PO Box 21, 2230 Landmark Place, Allenwood, NJ USA
732-223-6644 • Fax 732-223-1617
www.supco.com • info@supco.com

Benefits

- Instant re-start
- Easy installation with “fast clamp-on” connection
- Models for standard and scroll compressors

Applications

For use on any single phase air conditioning and refrigeration unit.

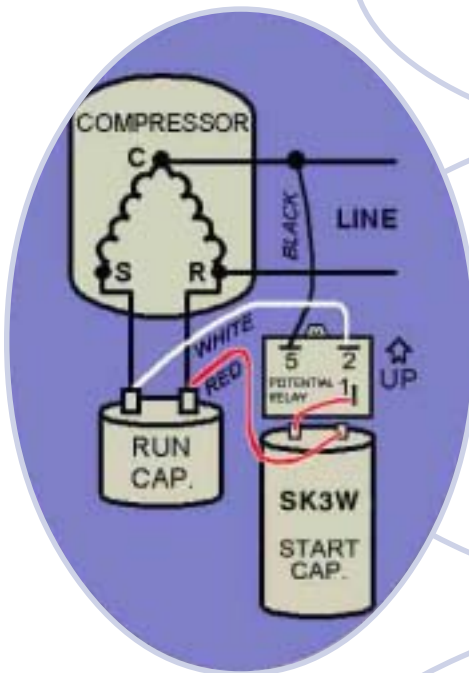

Installation Instructions

- Connect white wire to start terminal on run capacitor.
- Connect red wire to run terminal on run capacitor.
- Connect black wire using “fast clampon” connector to common wire.

Note: If the “fast clamp-on” isn’t suitable for the wire size, cut it and use wire nut (included) for connection.

“Fast Clamp-On” Connection

