



# D-Block

## Disconnect Mounting Block

**Why Jeopardize The Siding Of A Home To Mount An Air Conditioner Electrical Disconnect?**



**The D-Block provides quick and easy protection!**

- Protects siding from being crushed and dented during installation.
- Protects siding from insect infestation.
- Prevents dirt from getting between disconnect and siding.

### Features/Benefits


- Made from durable polyurethane.
- Can be painted or stained to match siding.
- Holes can be added easily.

3 Sizes	Outside Dimensions	Lap Type/Size
DB1074	10" X 7"	1/2" or 5/8" Lap/4" Siding
DB1285	12" X 8"	1/2" or 5/8" Lap/5" Siding
DB128D	12" X 8"	Dutch Lap

### SEALED UNIT PARTS CO., INC.

2230 Landmark Place • Allenwood, NJ 08720 USA  
(732) 223-6644 • Fax: (732) 223-1617  
info@supco.com • www.supco.com

# It's the simplest way to flush mount Electrical Disconnect boxes to siding.

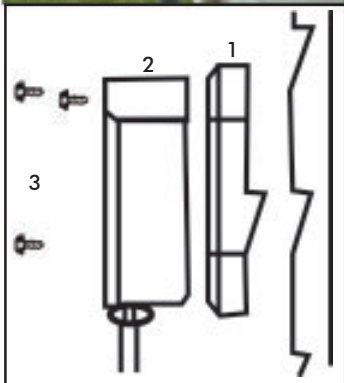

## Three Easy Steps for Installation...

1. Position the D-Block against the siding.
2. Position the Electrical Disconnect against the D-Block.
3. Secure the Disconnect and D-Block to the home.



F145-1105

## SEALED UNIT PARTS CO., INC.

2230 Landmark Place • Allenwood, NJ 08720 USA  
(732) 223-6644 • Fax: (732) 223-1617  
info@supco.com • www.supco.com

MSDS Sheet Available @ [www.supco.com](http://www.supco.com)