


## General Purpose Switching Relays

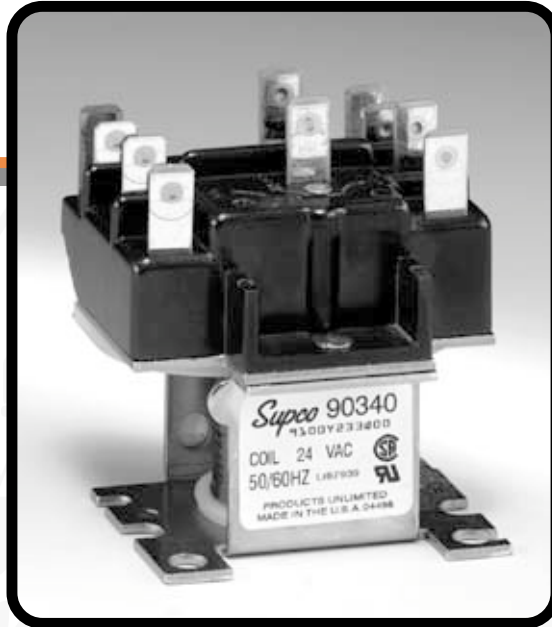

Supco series 903 relays are double pole, double throw (DPDT) devices primarily used for applications in heating, air conditioning and refrigeration.

They are also suitable for general purpose switching applications in appliance vending machines, fan controls and business machines provided the device being controlled is within the electrical limits of the relay.

Contact Rating	Power		Pilot	
	208/240V 120V	277V	208/240V 120V	277V
Full Load Amps	12	6	-	-
Resistive Amps*	15	15	3	3
Locked Rotor Amps	60	35	-	-
Horsepower	3/4	3/4	1/10	1/10

\*0.75 power factor

Supco No.	Coil Voltage	Terminal 1-2-3	Terminal 4-5-6	Cross Reference	
				Essex/RBM	Honeywell
90340	24	power	power	90-340	R8222D1014
90341	110/120	power	power	90-341	R4222D1013
90342	208/240	power	power	90-342	R4222N1021